


## PS40U150BCT&PS40U150HCT

### 40.0AMPS. SCHOTTKY BARRIER RECTIFIERS

#### FEATURE

- . High current capability
- . Ultra low forward voltage drop
- . Low power loss, high efficiency
- . High surge capability
- . High temperature soldering guaranteed  
260°C /10seconds, 0.25"(6.35mm)from case.




TO-263-2L  
PS40U150BCT



TO-262-3L  
PS40U150HCT

#### MECHANICAL DATA

- . Case: Molded with UL-94 Class V-0 recognized Flame Retardant Epoxy
- . Mounting position: any



Single phase, half wave, 60Hz,resistive or inductive load.

For capacitive load, derate current by 20%

#### MAXIMUM RATINGS (T<sub>C</sub>=25°C unless otherwise noted)

Parameter	Symbol	PS40U150BCT&PS40U150HCT		Units
Maximum Recurrent Peak Reverse Voltage	V <sub>RRM</sub>	150		V
Maximum RMS Voltage	V <sub>RMS</sub>	105		V
Maximum DC blocking Voltage	V <sub>DC</sub>	150		V
Maximum Average Forward Rectified Current at T <sub>C</sub> =100°C	I <sub>F(AV)</sub>	20.0 40.0		A
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load (JEDEC method)	I <sub>FSM</sub>	200.0		A
Typical Junction Capacitance (Note 1)	C <sub>J</sub>	536		pF
Operation Junction Temperature and Storage Temperature	T <sub>J</sub> , T <sub>STG</sub>	-55 to +150		°C

#### ELECTRICAL CHARACTERISTICS-(per leg) (T<sub>A</sub>=25°C unless otherwise noted)

Parameter	Symbol	Test conditions	Typ	Max	Units
Forward voltage drop	V <sub>F</sub>	T <sub>J</sub> =25°C	I <sub>F</sub> =2A	0.48	---
			I <sub>F</sub> =5A	0.63	---
			I <sub>F</sub> =20A	1.22	1.35
		T <sub>J</sub> =125°C	I <sub>F</sub> =2A	0.41	---
			I <sub>F</sub> =5A	0.53	---
			I <sub>F</sub> =20A	0.73	0.85
Reverse leakage current	I <sub>R</sub>	T <sub>J</sub> =25°C	V <sub>R</sub> =150V	---	μA
		T <sub>J</sub> =125°C	V <sub>R</sub> =150V	---	mA

#### THERMAL CHARACTERISTICS(T<sub>C</sub>=25°C unless otherwise noted)

Parameter	Symbol	PS40U150BCT	PS40U150HCT	Units
Typical Thermal Resistance (Note 2)	R <sub>(JC)</sub>	2.0	2.0	°C/W

#### Notes:

1. Measured at 1.0 MHz and applied reverse voltage of 4.0Vdc
2. Thermal Resistance from Junction to Case

## RATING AND CHARACTERISTIC CURVES

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

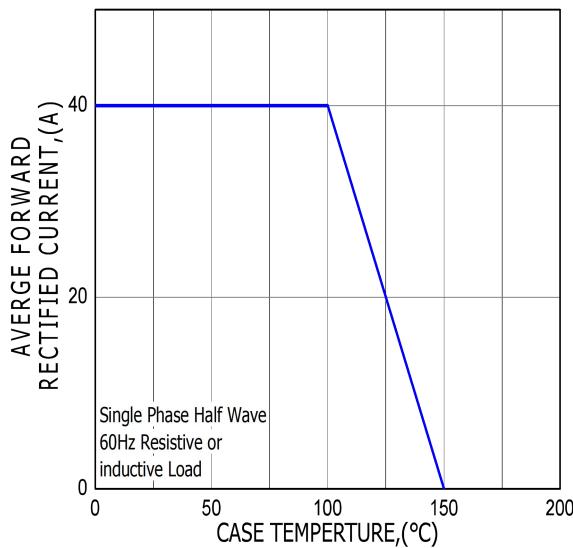


FIG.2-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

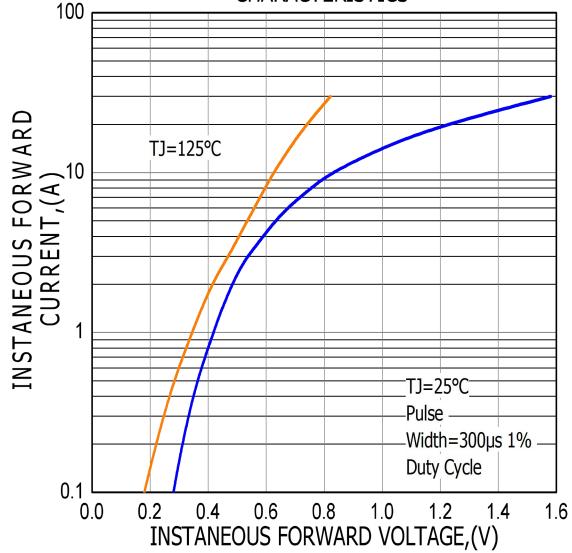


FIG.3-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT



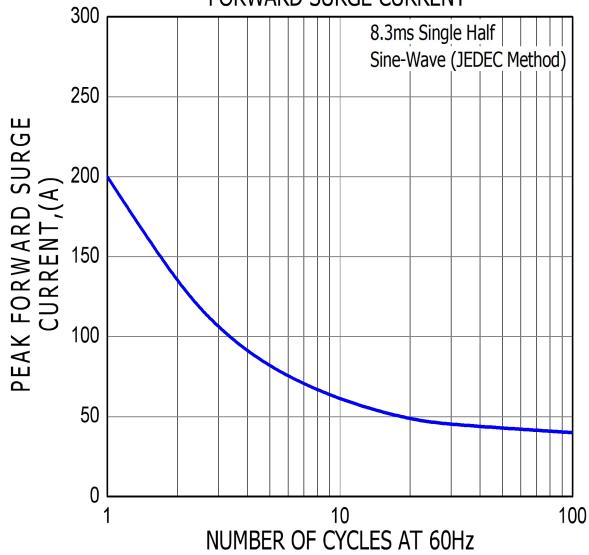



FIG.4-TYPICAL REVERSE CHARACTERISTICS

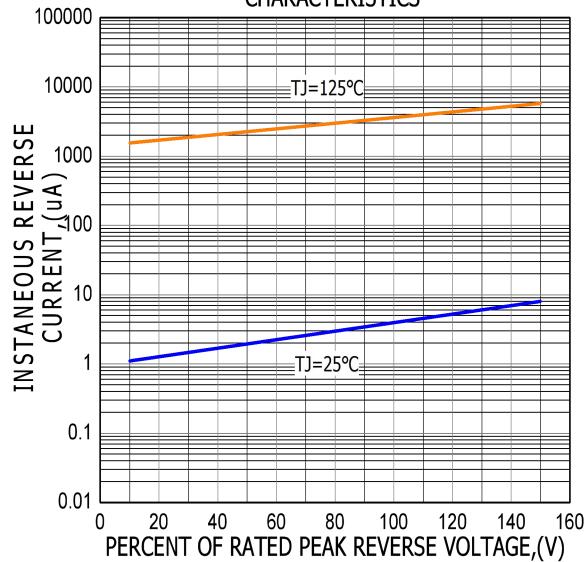

## TO-263-2L PACKAGE OUTLINE


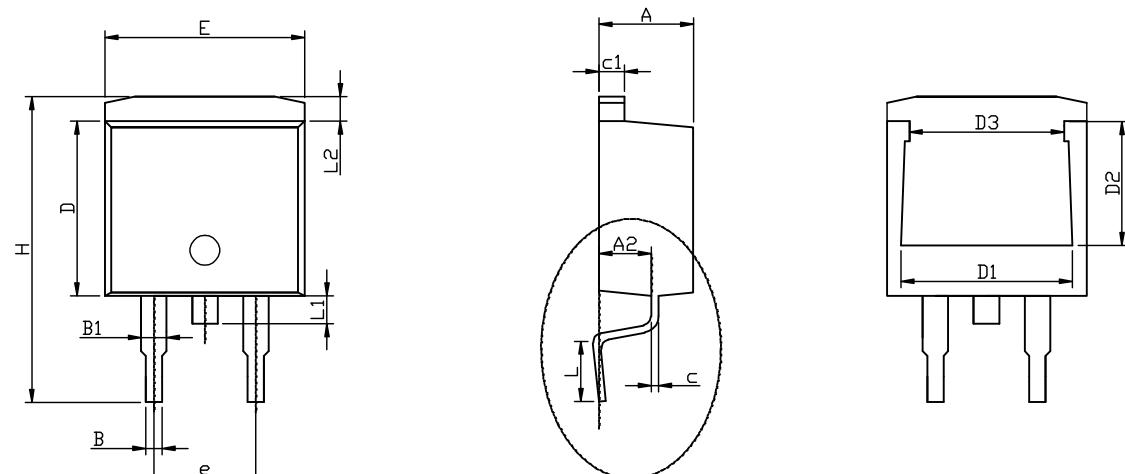


VIEW1

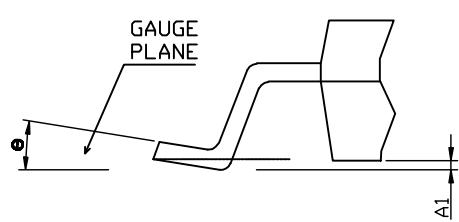

VIEW1



### RECOMMENDED LAND PATTERN

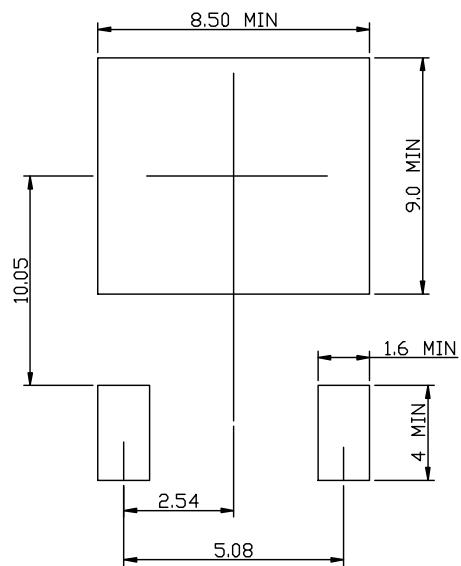


	MIN	NOM	MAX
A	4.50	4.70	4.90
A1	0.05	0.15	0.30
A2	2.45	2.60	2.70
B	0.72	0.82	0.92
B1	1.12	1.27	1.42
c	0.28	0.38	0.48
c1	1.17	1.27	1.37
D	8.46	8.66	8.86
D1	7.90	8.10	8.40
D2	5.50	5.70	5.90
D3	7.10	7.30	7.50
E	9.85	10.15	10.45
e		5.08BCS	
H	14.75	15.15	15.55
L	2.30	2.55	2.80
L1	1.20	1.40	1.60
L2	1.01	1.23	1.50
$\Theta$	0°	7°	8°

UNIT: mm

## TO-262-3L PACKAGE OUTLINE

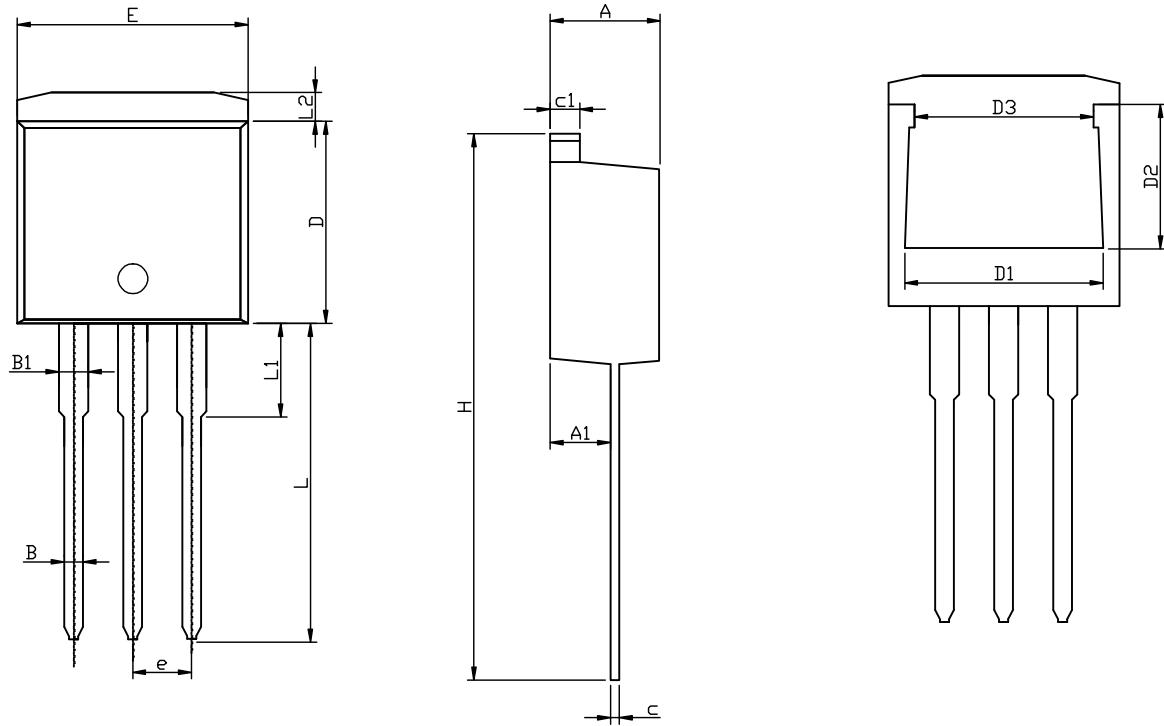

RECOMMENDED LAND PATTERN



UNIT: mm

	MIN	NOM	MAX
A	4.50	4.70	4.90
A1	2.45	2.60	2.70
B	0.72	0.82	0.92
B1	1.12	1.27	1.42
c	0.28	0.38	0.48
c1	1.17	1.27	1.37
D	8.46	8.66	8.86
D1	7.90	8.10	8.40
D2	5.50	5.70	5.90
D3	7.10	7.30	7.50
E	9.85	10.15	10.45
e		2.54	
H	23.20	23.60	24.00
L	13.10	13.60	14.10
L1	3.85	4.05	4.35
L2	1.01	1.23	1.50