


PESC0465MF

4.0AMPS.SIC SCHOTTKY BARRIER DIODE


FEATURE

- . 650V Schottky Diode
- . Zero Reverse Recovery/Zero Forward Recovery
- . High Efficiency Operation
- . Extremely Fast Switching
- . Temperature Independent Switching Behavior

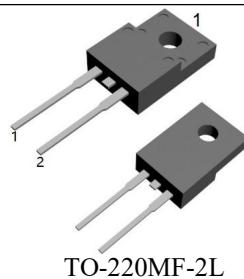

TYPICAL APPLICATIONS

- . Switch mode power supply
- . Power factor correction Solar Invertor
- . Solar inverter
- . Uninterruptible power supply



MAXIMUM RATINGS ($T_c=25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	PESC0465MF		Units
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	650		V
Maximum RMS Voltage	V_{RMS}	455		V
Maximum DC blocking Voltage	V_{DC}	650		V
Maximum Average Forward Rectified Current at $T_c = 150^\circ\text{C}$	$I_{F(AV)}$	4		A
Non-Repetitive Peak Forward Surge Current $T_c=25^\circ\text{C}, t_p=8.3 \text{ ms, Half Sine Pulse}$	I_{FSM}	32		A
Total power dissipation $T_c=25^\circ\text{C}$	P_D	50		W
Operation Junction Temperature and Storage Temperature	T_J, T_{STG}	-40 to +175		°C





ELECTRICAL CHARACTERISTICS ($T_c=25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Typ	Max	Units
Forward voltage $I_F=4\text{A}, T_j=25^\circ\text{C}$	V_F	1.27	1.5	V
		1.38	1.6	
Reverse current $V_R = 650\text{V}, T_j = 25^\circ\text{C}$	I_R	4	50	μA
		20	200	
Total capacitive charge $V_R = 400\text{V}, I_F = 4\text{A},$ $D_i/dt = 200\text{A}/\mu\text{s}, T_j = 25^\circ\text{C}$	Q_C	11.5	—	nC
Total capacitance $V_R = 0.1\text{V}, T_j = 25^\circ\text{C}, f = 1\text{MHz}$	C	250	—	pF
		26	—	
		19	—	



THERMAL CHARACTERISTICS($T_c=25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Typ	Max	Units
Typical Thermal Resistance Junction to Case	R_{JC}	3.0	----	°C/W


RATING AND CHARACTERISTIC CURVES

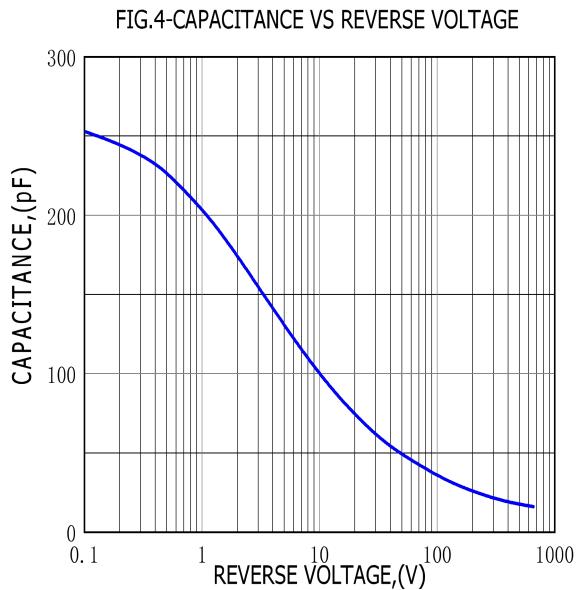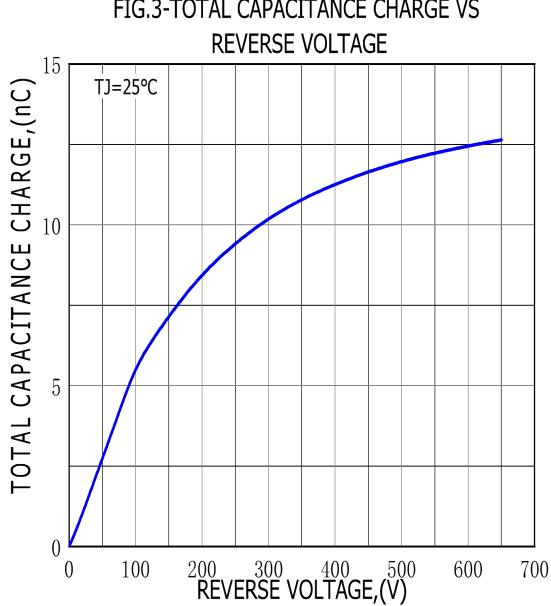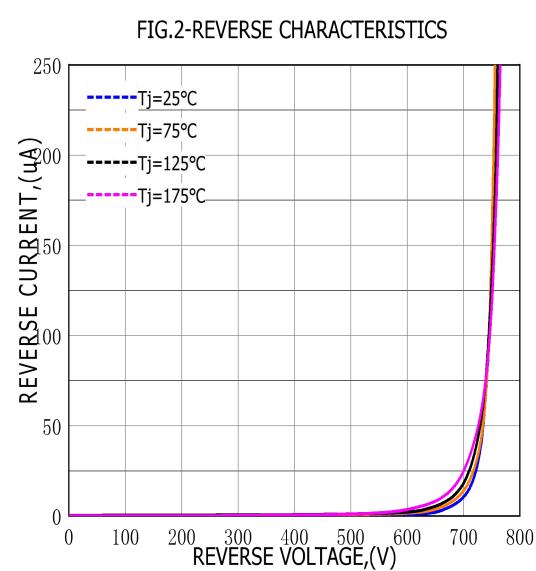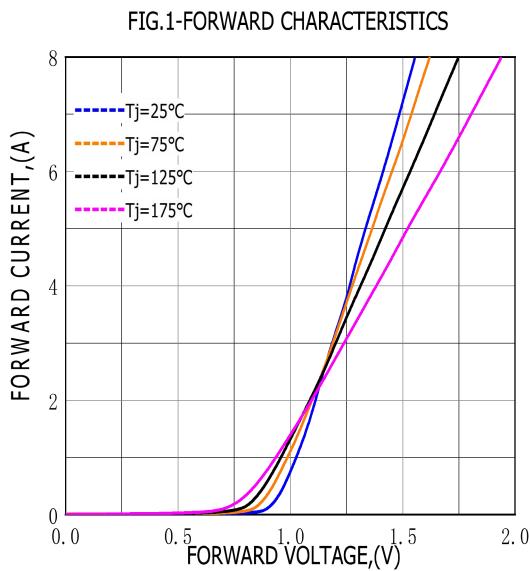

TO-220MF-2L PACKAGE OUTLINE

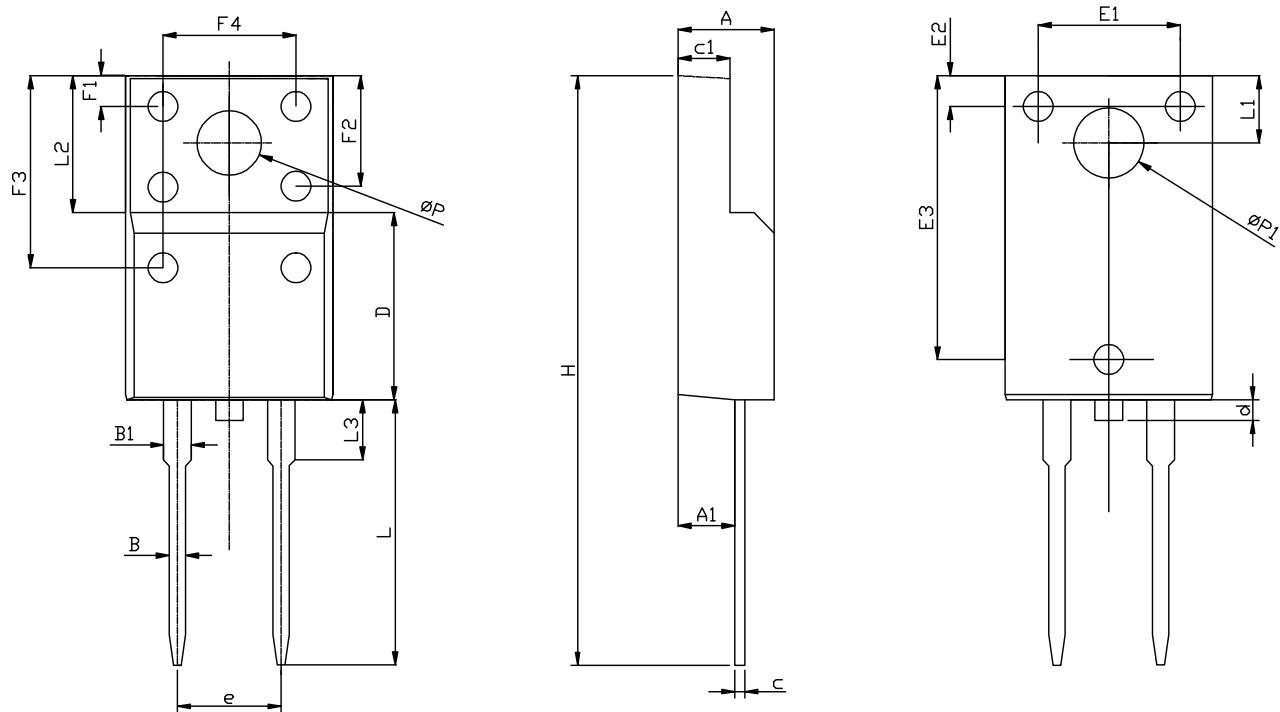

RECOMMENDED LAND PATTERN

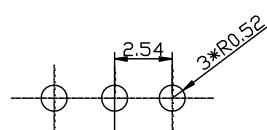

UNIT: mm

	MIN	NOM	MAX
A	4.50	4.70	4.90
A1	2.63	2.76	2.89
B	0.75	0.80	0.90
B1	1.15	1.35	1.55
c	0.40	0.50	0.60
c1	2.34	2.54	2.74
d			0.80
D	8.87	9.17	9.47
e	-	5.08REF	-
E	9.86	10.16	10.46
E1	6.86	6.96	7.06
E2	1.40	1.50	1.60
E3	13.80	13.90	14.00
F1	1.40	1.50	1.60
F2	5.15	5.40	5.65
F3	9.10	9.40	9.70
F4	6.70	7.00	7.30
H	28.50	29.00	29.50
L	12.58	12.98	13.38
L1	3.15	3.30	3.45
L2	-	6.70REF	-
L3	2.63	2.93	3.23
ΦP	2.90	3.18	3.48
ΦP1	3.15	3.45	3.75