


PS40U120CT&PS40U120FCT

40.0AMPS. SCHOTTKY BARRIER RECTIFIERS

FEATURE

- . High current capability
 - . Ultra low forward voltage drop
 - . Low power loss, high efficiency
 - . High surge capability
 - . High temperature soldering guaranteed
260°C /10seconds, 0.25"(6.35mm)from case.

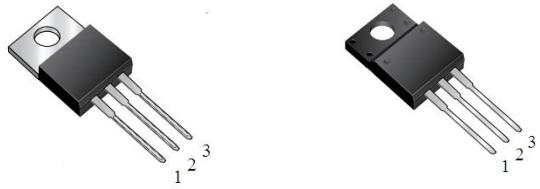


TO-220AB-3L
PS40U120CT

TO-220F-3L
PS40U120FCT

MECHANICAL DATA

- . Case: Molded with UL-94 Class V-0 recognized Flame Retardant Epoxy
 - . Mounting position: any



Single phase, half wave, 60Hz,resistive or inductive load.

For capacitive load, derate current by 20%

MAXIMUM RATINGS ($T_C=25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	PS40U120CT&PS40U120FCT		Units
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	120		V
Maximum RMS Voltage	V_{RMS}	84		V
Maximum DC blocking Voltage	V_{DC}	120		V
Maximum Average Forward Rectified Current at $T_C = 100^\circ\text{C}$	$I_{F(AV)}$	20.0		A
<i>Per Leg</i> <i>Total device</i>		40.0		
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load (JEDEC method)	I_{FSM}	200.0		A
Typical Junction Capacitance (Note 1)	C_J	850		pF
Operation Junction Temperature and Storage Temperature	T_J, T_{STG}	-55 to +150		°C

ELECTRICAL CHARACTERISTICS-(per leg) (T_A=25°C unless otherwise noted)

Absolute Maximum Ratings (per leg) (TA = 25°C unless otherwise noted)						
Parameter	Symbol	Test conditions		Typ	Max	Units
Forward voltage drop	V_F	$T_J = 25^\circ\text{C}$	$I_F = 3\text{A}$	0.47	---	V
			$I_F = 5\text{A}$	0.53	---	
			$I_F = 20\text{A}$	0.90	1.00	
		$T_J = 125^\circ\text{C}$	$I_F = 3\text{A}$	0.41	---	
			$I_F = 5\text{A}$	0.49	---	
			$I_F = 20\text{A}$	0.70	0.80	
Reverse leakage current	I_R	$T_J = 25^\circ\text{C}$	$V_R = 120\text{V}$	---	100	μA
		$T_J = 125^\circ\text{C}$	$V_R = 120\text{V}$	---	25	mA

THERMAL CHARACTERISTICS($T_C=25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	PS40U120CT	PS40U120FCT	Units
Typical Thermal Resistance (Note 2)	$R_{(JC)}$	2.0	3.0	°C/W

Notes: 1. Measured at 1.0 MHz and applied reverse voltage of 4.0Vdc

2. Thermal Resistance from Junction to Case

RATING AND CHARACTERISTIC CURVES

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

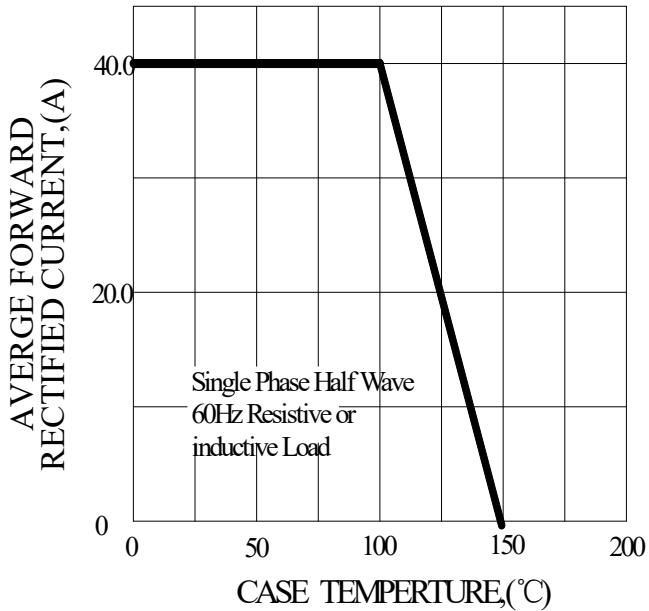


FIG.2-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

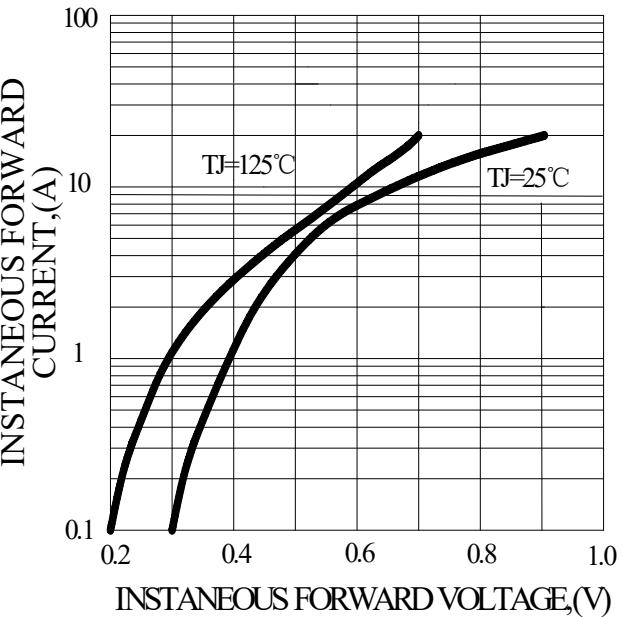


FIG.3-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT




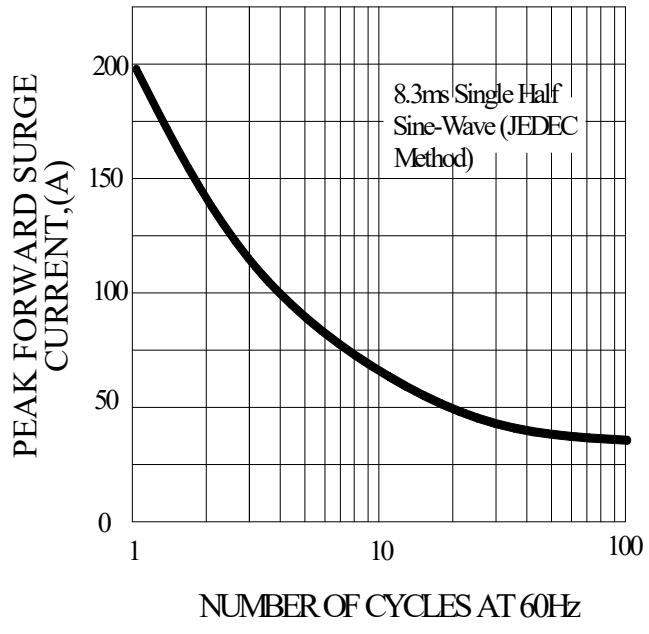



FIG.4-TYPICAL REVERSE CHARACTERISTICS

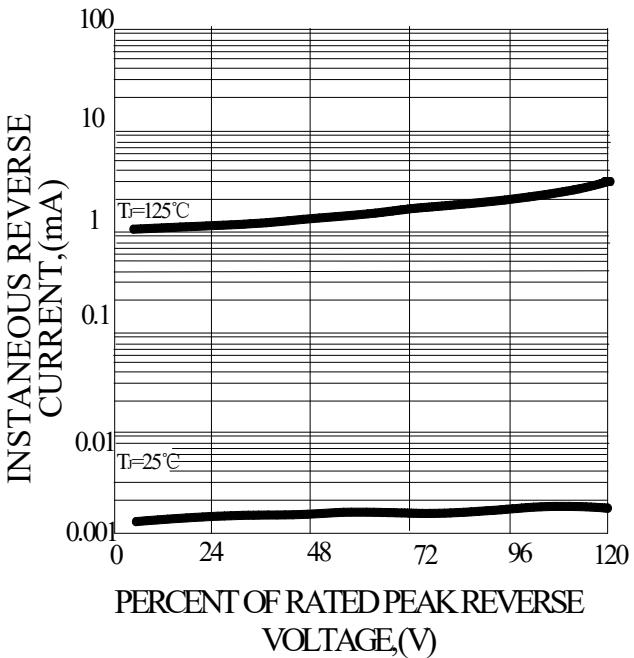

TO-220AB-3L PACKAGE OUTLINE

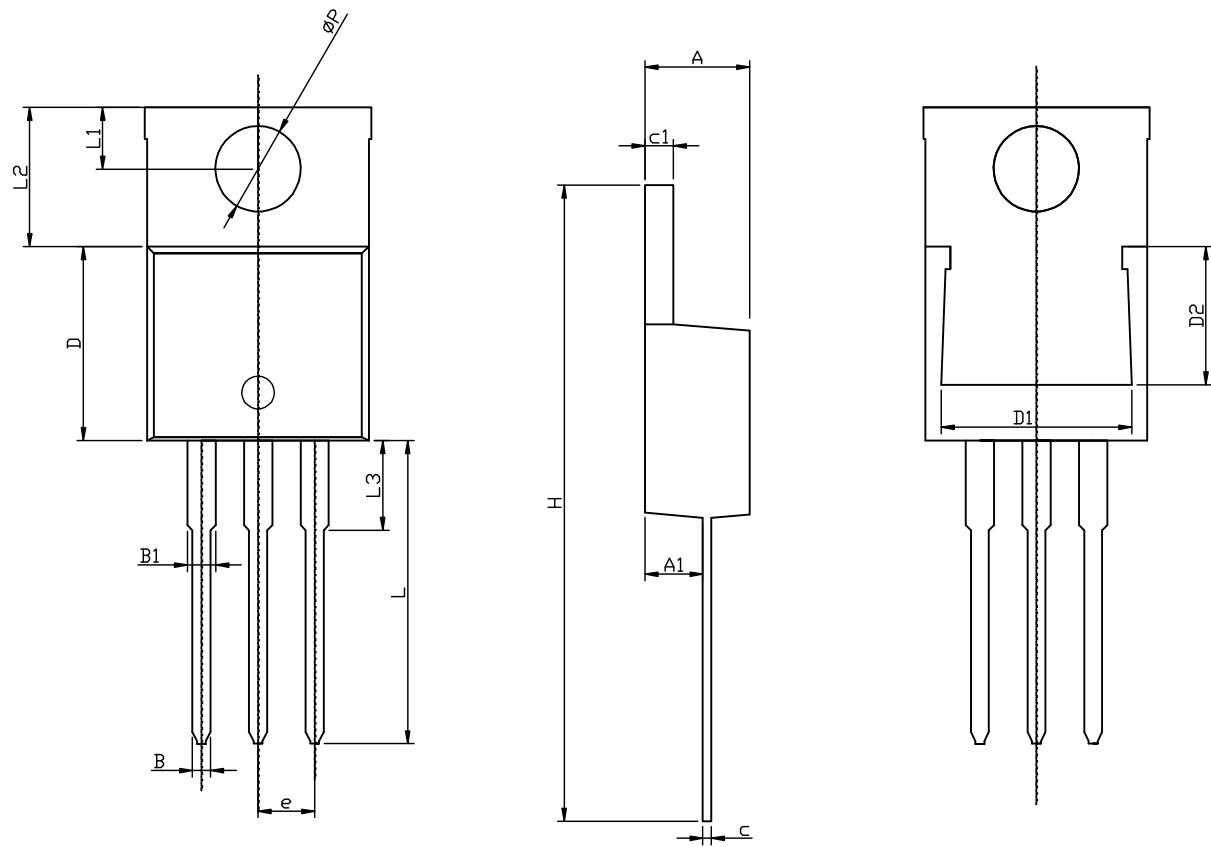





RECOMMENDED LAND PATTERN




UNIT: mm

	MIN	NOM	MAX
A	4.50	4.70	4.90
A1	2.45	2.60	2.70
B	0.72	0.82	0.92
B1	1.12	1.27	1.42
c	0.28	0.38	0.48
c1	1.17	1.27	1.37
D	8.46	8.66	8.86
D1	7.90	8.10	8.40
D2	5.50	5.70	5.90
e	2.45	2.55	2.65
E	9.85	10.15	10.45
H	28.00	28.50	29.00
φP		3.84	
L	13.1	13.6	14.1
L1	2.54	2.74	2.94
L2	6.04	6.24	6.44
L3	3.85	4.05	4.35

TO-220F-3L PACKAGE OUTLINE

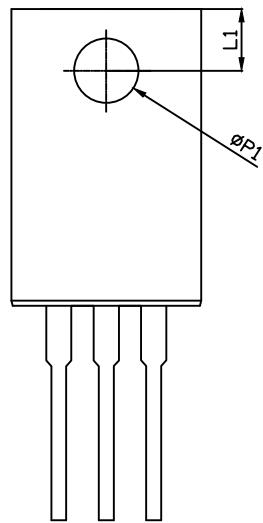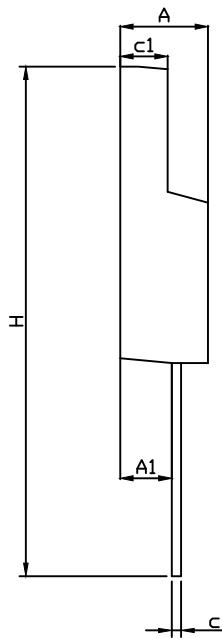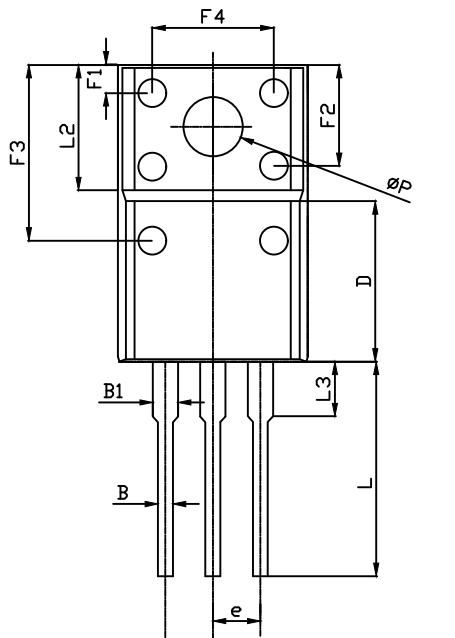

RECOMMENDED LAND PATTERN



UNIT: mm

	MIN	NOM	MAX
A	4.40	4.60	4.80
A1	2.63	2.76	2.89
B	0.75	0.80	0.90
B1	1.12	1.27	1.42
c	0.40	0.50	0.60
c1	2.60	2.70	2.80
D	7.50	7.80	8.10
e	-	2.55REF	-
E	9.86	10.00	10.10
F1	1.90	2.12	2.40
F2	5.00	5.30	5.65
F3	8.70	9.00	9.30
F4	6.20	6.50	6.80
H	27.80	28.30	28.80
L	13.10	13.30	13.50
L1	2.85	3.00	3.15
L2	-	6.70REF	-
L3	3.10	3.60	4.10
ΦP	3.00	3.30	3.60
ΦP1	2.80	3.10	3.40