

2N7002KM

60V N-Channel MOSFET

0.34A 60V; $R_{DS(ON)} = 0.9\Omega @ 10V$, $R_{DS(ON)} = 1.1\Omega @ 4.5V$

FEATURE

- Trench Technology Power MOSFET
- Low $R_{DS(ON)}$
- Low Gate Charge
- ESD Protected


Application

- Load Switch
- DC/DC Converter


MARKING:



SOT-723



Schematic diagram



ABSOLUTE MAXIMUM RATINGS ($T_a = 25^\circ C$ unless otherwise noted)

Parameter	Symbol	Value	Unit
Drain - Source Voltage	V_{DS}	60	V
Gate - Source Voltage	V_{GS}	± 20	V
Continuous Drain Current ^{1,5}	I_D	0.34	A
Pulsed Drain Current ²	I_{DM}	1.0	A
Power Dissipation ^{4,5}	P_D	0.2	W
Thermal Resistance from Junction to Ambient ⁵	$R_{\theta JA}$	625	$^\circ C/W$
Junction Temperature	T_J	150	$^\circ C$
Storage Temperature	T_{STG}	-55 ~ +150	$^\circ C$


MOSFET ELECTRICAL CHARACTERISTICS($T_a=25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Test Condition	Min	Type	Max	Unit
Off CHARACTERISTICS						
Drain - Source Breakdown Voltage	$V_{(\text{BR})\text{DSS}}$	$V_{GS} = 0\text{V}, I_D = 250\mu\text{A}$	60			V
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS} = 48\text{V}, V_{GS} = 0\text{V}$			1	μA
Gate - Body Leakage Current	I_{GSS}	$V_{GS} = \pm 20\text{V}, V_{DS} = 0\text{V}$			± 5	μA
ON CHARACTERISTICS³						
Gate Threshold Voltage	$V_{GS(\text{th})}$	$V_{DS} = V_{GS}, I_D = 250\mu\text{A}$	1	1.5	2.5	V
Drain-source On-resistance	$R_{DS(\text{on})}$	$V_{GS} = 10\text{V}, I_D = 0.3\text{A}$		0.9	2.5	Ω
		$V_{GS} = 4.5\text{V}, I_D = 0.2\text{A}$		1.1	3	
DYNAMIC CHARACTERISTICS						
Input Capacitance	C_{iss}	$V_{DS} = 30\text{V}, V_{GS} = 0\text{V}, f = 1\text{MHz}$		23.7		pF
Output Capacitance	C_{oss}			5.3		
Reverse Transfer Capacitance	C_{rss}			2.5		
Gate Resistance	R_g	$V_{DS} = 0\text{V}, V_{GS} = 0\text{V}, f = 1\text{MHz}$		160		Ω
SWITCHING CHARACTERISTICS						
Total Gate Charge	Q_g	$V_{DS} = 30\text{V}, V_{GS} = 10\text{V}, I_D = 0.3\text{A}$		0.29		nC
Gate-source Charge	Q_{gs}			0.23		
Gate-drain Charge	Q_{gd}			0.12		
Turn-on Delay Time	$t_{d(\text{on})}$	$V_{DD} = 30\text{V}, V_{GS} = 10\text{V}, R_L = 100\Omega, R_G = 3\Omega$		3.5		ns
Turn-on Rise Time	t_r			3.2		
Turn-off Delay Time	$t_{d(\text{off})}$			12		
Turn-off Fall Time	t_f			10		
SOURCE-DRAIN DIODE CHARACTERISTICS						
Diode Forward Voltage ³	V_{SD}	$V_{GS} = 0\text{V}, I_S = 0.3\text{A}$			1.2	V



Notes:

1. The maximum current rating is limited by package.
2. Pulse Test : Pulse Width $\leq 10\mu\text{s}$, duty cycle $\leq 1\%$.
3. Pulse Test : Pulse Width $\leq 300\mu\text{s}$, duty cycle $\leq 2\%$.
4. The power dissipation PD is limited by $TJ(\text{MAX}) = 150^\circ\text{C}$.
5. Device mounted on 1in2 FR-4 board with 2oz. Copper, in a still air environment with $TA = 25^\circ\text{C}$.

Typical Electrical and Thermal Characteristics

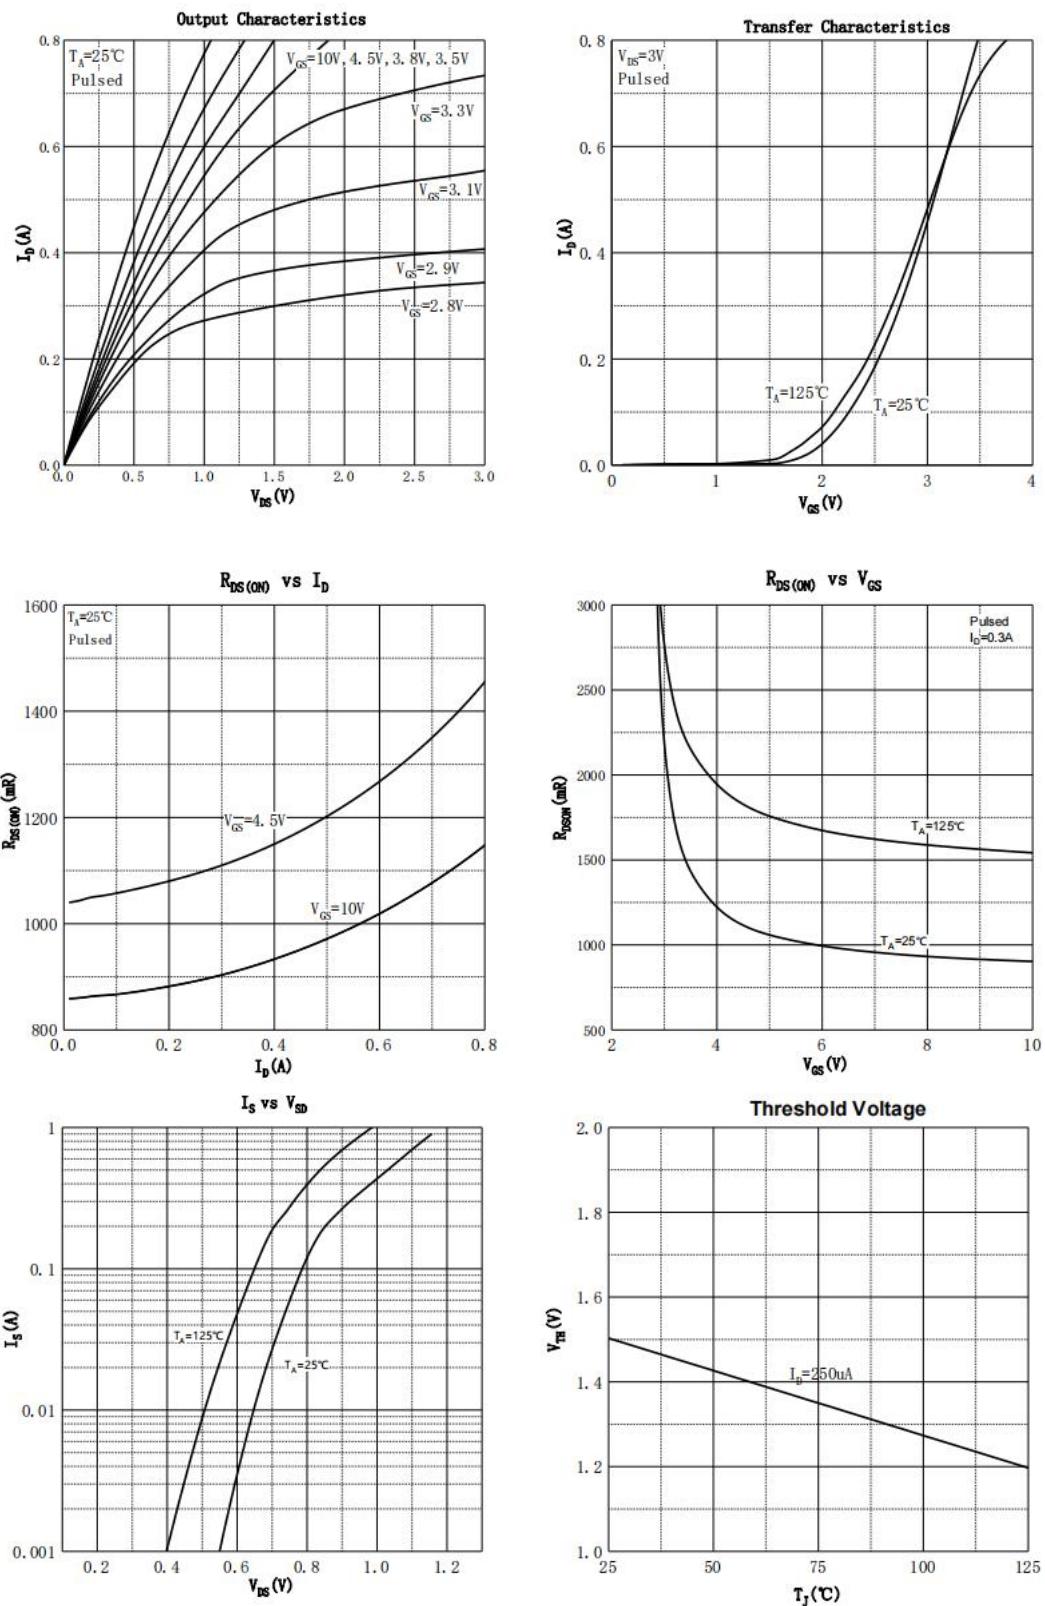

SOT-723 Package Information

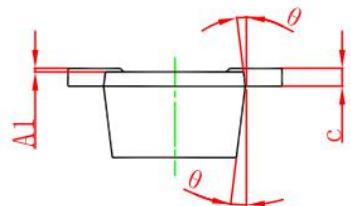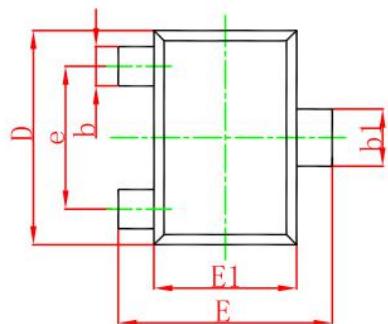

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.430	0.500	0.017	0.020
A1	0.000	0.050	0.000	0.002
b	0.170	0.270	0.007	0.011
b1	0.270	0.370	0.011	0.015
c	0.080	0.150	0.003	0.006
D	1.150	1.250	0.045	0.049
E	1.150	1.250	0.045	0.049
E1	0.750	0.850	0.030	0.033
e	0.800TYP.		0.031TYP.	
θ	7° REF.		7° REF.	

